

Digital Signage Solutions

Interactive and Intelligent Signage

- Overview
- Product Offerings
- Case Studies
- Product Selection



DeviceOn SignageCMS

Variety of Sizes & Easy Installation

Validated Leading Signage CMS

Optimal Performance & Flawless Playback

 NVIDIA  intel  AMD

Entry Level	Ultra Slim	Multi-Display	Modular
 2 4K ULTRA HD	 4 8K ULTRA HD	 8 8K ULTRA HD	 3 4K ULTRA HD
DS-410	DS-085	DS-630	DS-202

ADVANTECH

Intel partner
Titanium

Enabling an Intelligent Planet

www.advantech.com

Interactive and Intelligent Digital Signage

Interactive digital signage is efficient and powerful; and gives businesses a creative opportunity to connect with their customers. Advantech digital signage solutions provide multiple technologies, value-added software, security, and backup solutions that are capable of changing the way businesses communicate with their customers. Indeed, these solutions provide relevant, real-time information and can lead to more sales.



Revolutionary Technologies

- Choices of latest Intel, AMD, arm cutting edge platforms
- Ultra-slim, compact, modular form factors
- Fanless and active cooling options for vertical selection

Value-Added Software

Value Added Software to be integrated into 3rd parties CMS software including:

- 4K/8K video up to 8 displays support
- Built-in DeviceOn for Display control management
- Interactive peripherals API support

Security & Backup Support

- Built-in display content security and recovery mechanism
- Whitelisting security and remote system backup
- Optimizes playback setting to minimized downtime

Digital Signage Solutions

Entry Level



DS-100

Rockchip RK3399



DS-410

Intel® Celeron®
J6412 quad-core

Ultra Slim



DS-066

Intel® Celeron®
J1900 quad-core



DS-082

AMD Ryzen™
V1000/ R1000



DS-085

11th Gen. Intel® Core™
i3/ i5/ i7/ Celeron®



DeviceOn

Device Management

SignageCMS

Content Management

Security

Whitelisting and Backup Recovery



Multi-Display



DS-580

Intel® Atom® E3950
with NVIDIA®
GT1030 GPU



DS-780


6th Gen. Intel® Core™
i3/ i5/ i7/ Celeron®



DS-630

AMD V2000
RX6600

SDM/OPS Modular



DS-202

8th Gen. Intel® Core™
i3/ i5/ Celeron®



DS-211

Rockchip RK3399

Palm-Sized Signage Solution



Latest CPU Technology
Intel Atom® Celeron® J6412



Real-Time Monitoring
Monitor edge signage devices from anywhere at anytime



SignageCMS DeviceOn

4K
ULTRA HD



Mini Form Factors
Small footprint and slim design for easy and convenient installation



Easy to Maintain
Update BIOS / Power Off / Restart system easily anywhere



DS-410

Advantech's DS-410 boasts a small footprint and slim design that fits easily into limited space applications.

The DS-410 demonstrates Advantech's commitment to helping customers transform their businesses, and stay relevant in an increasingly digitized world.

System Specifications

- 4GB/8GB LPDDR4 Memory
- M.2 SATA SSD storage
- M.2 for Wi-Fi
- Supports 2 x COM and 2 x Ethernet ports

System Diagram



The Most Slim 4 x 4K Signage Solution




At just 19 mm thick, DS-085 is the world's slimmest digital signage player powered by 11th Gen Intel® processors. This thin and powerful signage player is equipped with 4 x HDMI displays capable of up to 4K resolution. Advantech SignageCMS and DeviceOn are also on offer for free.

System Specifications

- 4 x independent 4K outputs via 4 x HDMI 2.0
- Slim design with only 19 mm thickness
- Fanless & cable-less design for easy maintenance

System Diagram

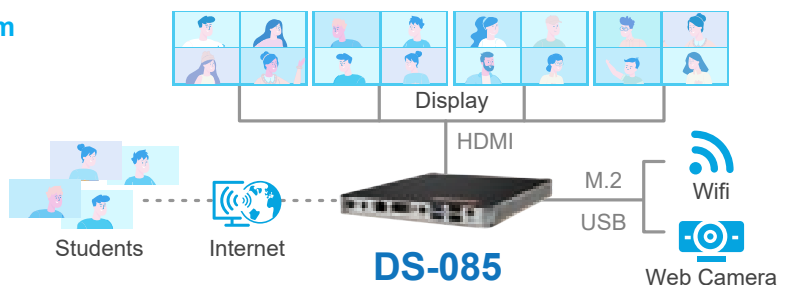

8K Signage TV Wall


The DS-085 is the ultimate solution for your digital signage needs. It features 4 x HDMI 2.0 for TV walls and does not need pricey controllers. It supports 8K to enable the delivery of crisp content. The package also includes SignageCMS software to produce a complete and cost-effective solution.



Features

- Support 4 x HDMI 2.0 x 4
- RED certification for Wi-Fi
- Slim design for easy system installation

System Diagram

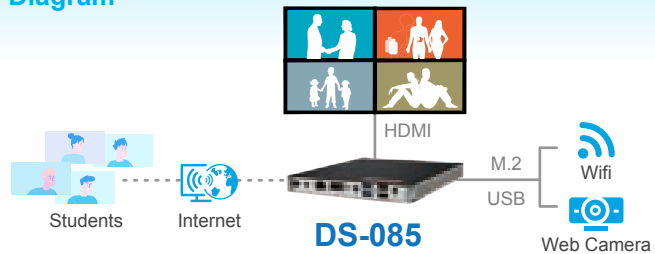

Digital Menu Board


DS-085 is the ultimate cost-efficient solution for businesses looking to streamline their digital menu board setup. With its powerful 4 x HDMI ports, DS-085 eliminates the need for multiple signage players, saving both space and money.



Features

- Support up to 4K digital menu board by 4 displays
- Diverse I/O available — including 4 x USB/1 x COM/ 2 x LAN
- Fanless design prevents dust issues

System Diagram

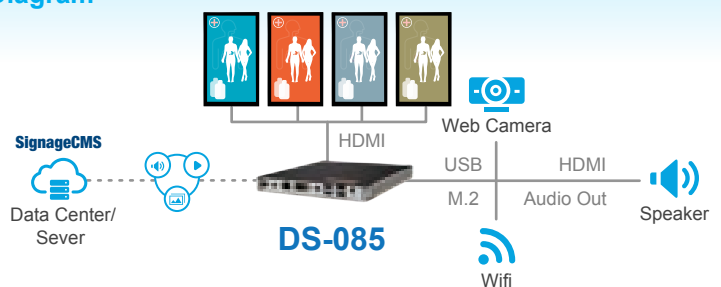

Interactive Kiosks


Bring your kiosk to life with the DS-082 and engage your audience like never before. DS-082 delivers powerful AMD V1000/R1000 graphics capabilities in a sleek and compact form factor. With exceptional graphics performance, this player is perfect for kiosks that require both power and space efficiency.



Features

- Slim 19 mm thick design
- Fanless design prevents issues caused dust
- AMD Radeon Graphics with excellent performance

System Diagram

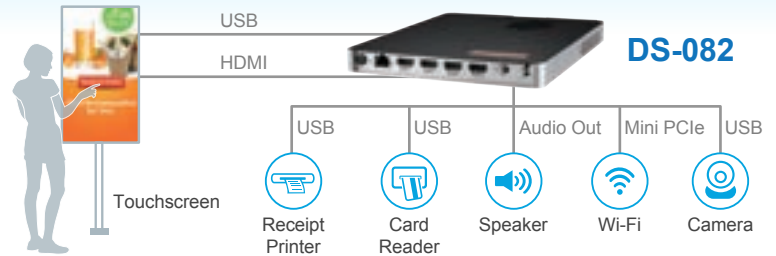

Flight Information Boards


The Advantech DS-202 is a highly-cost-effective option for airport flight information boards. It features an 8th Gen. Intel® Core i3/i5/ Celeron® processor and complies with the Intel Smart Display Modules standards. This powerful combination offers exceptional performance and reliability — making it the perfect choice for any airport looking to upgrade their flight information displays.



Features

- 8th Gen. Intel® Core i3/i5/ Celeron®
- Fanless design prevents dust issues
- Supports up to 3 x displays (HDMI/DP/miniDP)

System Diagram

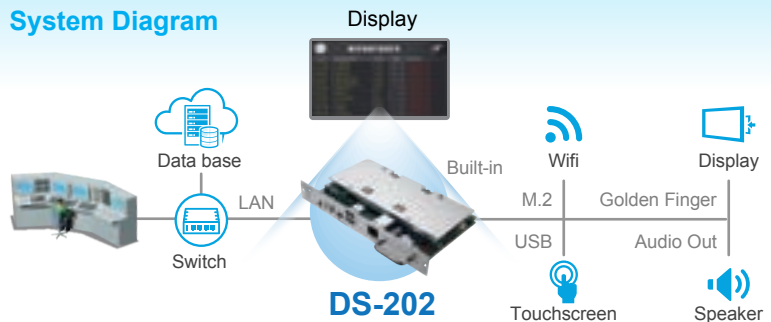

Main Street Shopping Windows

DS-100 is a compact and fanless signage player powered by the Arm-based Cortex A73 Rockchip RK3399 CPU. This makes it an ideal choice for retail stores' shopping windows or vertical pillars/walls. Its 24/7 playback test and support for direct AT boot-up make it easy to turn on/off.



Features

- Arm-Based CPU, RK3399 with Mali-T860 GPU
- 4K VP9 and 4K 10bits H265/H264 video decode
- Support up to 1-2 HDMI TV in Android OS
- Supports USB 2.0 and SD card extension

System Diagram



Casino Slot Machines


The Slim DS-082, equipped with an AMD CPU. It offers enhanced visual effects for 2D games in casinos and providing an immersive experience for players. Additionally, it comes in both fan and fanless versions — catering to different gaming system needs.



Features

- AMD Ryzen™, AMD Ryzen™ Embedded R1606G with Radeon™ Vega 3 Graphics
- Fanless or Fanned design integrated into a 19 mm thick chassis
- 3~4 x HDMI, 1 x SPDIF/Line Out for multi-display gaming machines
- 1 x RS232 to control gaming machine interactive equipment

System Diagram

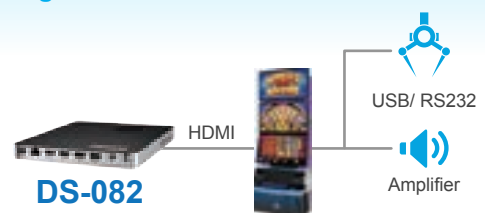

Food Court Menu Boards


With the compact and powerful DS-410 Mini PC, restaurant customers can easily stay informed and entertained while waiting in line. Equipped with HDMI, VGA, and USB ports for touch screen functionality, the DS-410 allows for manual board displays and advertisements, increasing revenue for businesses.



Features

- Intel® Celeron® J6412 quad-core
- Small and stylish die-cast design
- Fanless design avoids issues caused by long-term dust accumulation

System Diagram

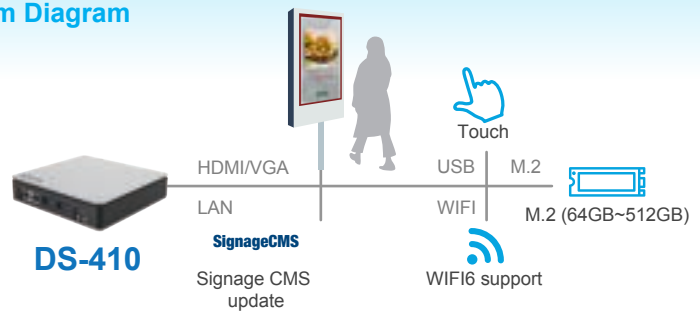

Avoid Hacker Attacks in Important Places

DS-085 supports Triellx Application Control whitelist protection as an optional feature. This blocks unauthorized application execution. Additionally, it comes with Acronis Cyber Backup that offers exclusive ransomware defense technology called Active Protection.



Features

- Additional purchase of Triellx service blocks unauthorized media.
- Additional purchase of Acronis provides ransomware defense technology



Trellix Acronis DeviceOn SignageCMS

Digital Signage Solutions

Entry-Level Series

Ultra-Slim Series



Model Name		DS-100	DS-100 Lite	DS-410	DS-082	DS-085S	DS-085L
Processor	CPU	Rockchip RK3399	Rockchip RK3399	Intel® Celeron® J1900	AMD Ryzen™ V1807B AMD Ryzen™ V1605B AMD Ryzen™ R1606G	Intel® Core™ i7-1165G7 Intel® Core™ i5-1135G7 Intel® Core™ i3-1115G4E Intel® Celeron® 6305E	"Intel® Core™ i7-1165G7 Intel® Core™ i5-1135G7 Intel® Core™ i3-1115G4E Intel® Celeron® 6305E"
	BIOS	-	-	AMI uEFI 64 Mbit	AMI uEFI 128Mbit	AMI uEFI 128 Mbit	AMI uEFI 128 Mbit
	Chipset	-	-	Integrated with CPU	Integrated with CPU	Integrated with CPU	Integrated with CPU
Memory	Technology	LPDDR3 1600MHz	LPDDR3 1600MHz	LPDDR4 3733Mhz	DDR4 2400MHz	DDR4 2666MHz	DDR4 2666MHz
	Max. Capacity	2 GB on board	2 GB on board	4GB/8GB on Board	32 GB (16 GB per SODIMM)	32 GB (16 GB per SODIMM)	32 GB (16 GB per SODIMM)
	Socket	-	-	-	2 x 260-pin SODIMM	2 x 260-pin SODIMM	2 x 260-pin SODIMM
Display	Controller	-	-	Integrated with CPU	Integrated with CPU	Integrated with CPU	Integrated with CPU
	Graphics Engine	Mali-T860MP4	Mali-T860MP4	Intel HD Graphics	AMD Radeon HD graphics	Intel® Iris® Xe Graphics	Intel® Iris® Xe Graphics
	Graphics Memory	-	-	Shared system memory	Shared system memory	Shared system memory	Shared system memory
	Multiple Display	2	2	2	4 (V series) 3 (R series)	4	4
	Interface	1 x HDMI 2.0, 1 x HDMI 1.4	1 x HDMI 2.0, 1 x HDMI 1.4	1 x HDMI 2.0 1 x VGA	4 x HDMI 2.0 (V series) 3 x HDMI 2.0 (R series)	4 x HDMI 2.0	4 x HDMI 2.0
Max. Resolution	3840 x 2160 @ 60Hz	3840 x 2160 @ 60Hz	4096 x 2304 @ 60Hz	4096 x 2304 @ 60Hz	4096 x 2304 @ 60Hz	4096 x 2304 @ 60Hz	
Expansion Interface	M.2	1 x 2230 E key	1 x 2230 E key	1 x 2242 M key for storage 1 x 2230 E key for Wi-Fi	1 x 2242 M key for storage 1 x 2230 E key for Wi-Fi	1 x 2242 M key for storage 1 x 2230 E key for Wi-Fi	1 x 2242 M key for storage 1 x 2230 E key for Wi-Fi
	Mini PCIe	-	-	-	-	-	-
	PCIe x16	-	-	-	-	-	-
	Micro SD Card	1	1	-	-	-	-
Ethernet	Connector	2 x RJ-45	1 x RJ-45	2 x RJ45	1 x RJ-45	2 x RJ-45	2 x RJ-45
Audio	Connector	1 x Line-out	1 x Line-out	-	1 x SPDIF/Line-out/Mic-in with jack sense support	1 x SPDIF/Line-out/Mic-in	1 x SPDIF/Line-out/Mic-in
WatchDog Timer		Yes	Yes	Yes	Yes	Yes	Yes
Storage	SATA	-	-	-	-	-	-
	mSATA	-	-	-	-	-	-
	eMMC	16 GB eMMC on board	16 GB eMMC on board	-	-	-	-
I/O	USB 3.0	1	1	2	2	2	2
	USB 2.0	1	1	-	2	2	6
	COM	1 x Console port	-	2 x RS-232	1 x RS-232	1	2
Power	Power Supply	DC 12V input	DC 12V input	DC 19V input	DC 19V input	DC 19V input	DC 19V input
Environment	Operating Temperature	0-45 °C	0-45 °C	HDD: 0-40 °C SSD: 0-45 °C (with 0.7m/s airflow)	HDD: 0-40 °C (with 0.7m/s airflow)	0-40 °C (with 0.7m/s airflow)	0-55 °C (with 0.7m/s airflow)
Physical Characteristics	Dimensions (L x W x H)	135 x 130 x 29 mm	115 x 110 x 20 mm	124 x 116 x 26 mm	180 x 190 x 19 mm	180 x 190 x 19 mm	210 x 178 x 40 mm
Operating System		Android 7.1.2	Android 7.1.2	Microsoft Windows, Linux (optional)	Microsoft Windows, Linux (optional)	Microsoft Windows, Linux (optional)	Microsoft Windows, Linux (optional)
Certifications	EMC	CE, FCC Class B, CCC, BSMI	CE, FCC Class B, CCC, BSMI	CE, FCC Class B, CCC, BSMI	CE, FCC Class B, CCC, BSMI	CE, FCC Class B, CCC, BSMI	CE, FCC Class B, CCC, BSMI
	Safety	UL, CB, CCC, BSMI	UL, CB, CCC, BSMI	UL, CB, CCC, BSMI	UL, CB, CCC, BSMI	UL, CB, CCC, BSMI	UL, CB, CCC, BSMI

Note: "-" means not applicable.

Integrated Software

iService/ SignageCMS

Multimedia Management Software

System Management	Web interface, multimedia management, user-friendly interface, remote management
Interactive Content Editing	Add/edit/delete the interactive button or interactive content.
Dispatch Management	Remote dispatch, player overview, group dispatch, schedule dispatch, history search
Account Management	Add/edit/delete user, user name/password/description/main, account permissions

WISE-DeviceOn

Device Monitoring and Management

Device Management	Instant device monitoring and troubleshooting, regular inspections, predictive maintenance, data acquisition, device management
Monitoring & Control	Real-time monitoring, device list and status, SW/HW health monitoring, HDD predictive maintenance, system screen lost events
Update Management	OTA upgrade support, software remote patching and upgrade, update status report
Alert & Action	SMS notifications, email notifications, event log

Multi-Display Series Modular Series



Model Name		DS-630	DS-200	DS-202	DS-211
Processor	CPU	AMD V2748	Intel® Core™ i5-8400H Intel® Core™ i3-8100H Intel® Celeron® G4930E	Intel® Atom™ x6413E	Rockchip RK3399
	BIOS	AMI uEFI 128 Mbit	AMI uEFI 128 Mbit	AMI uEFI 128 Mbit	-
	Chipset	Intel Q170	Intel QM370	Integrated with CPU	-
Memory	Technology	DDR4 3200MHz	DDR4 2400MHz	DDR4 2666MHz	LPDDR4-3200
	Max. Capacity	32 GB (16 GB per SODIMM)	32 GB (16 GB per SODIMM)	32 GB (16 GB per SODIMM)	2GB/4GB on-board
	Socket	2 x 260-pin SODIMM	2 x 260-pin SODIMM	2 x 260-pin SODIMM	-
Display	Controller	Integrated with CPU	Integrated with CPU	Integrated with CPU	-
	Graphic Engine	AMD Radeon graphics	Intel UHD Graphics 630	Intel® UHD Graphics	Mali-T860MP4
	Graphics Memory	Shared system memory	Shared system memory	Shared system memory	-
	Multiple Display	4	3	3	2
	Interface	HDMI 2.0 x 2, DP++ type C x 2	1 x PCIe x8 (98 pin), 1 x Mini DP**	1 x PCIe x8 (98 pin), 1 x Mini DP++	1 x JAE TX25 (80 pin) 1 x HDMI 2.0
	Max. Resolution	4096 x 2160 @ 60Hz	4096 x 2304 @ 60Hz	4096 x 2304 @ 60Hz	3840 x 2160 @ 60Hz
Expansion Interface	M.2	1 x 2230 E key	1 x 2242 M key for storage 1 x 2230 E key for Wi-Fi	-	1
	Mini PCIe	-	-	-	1
	PCIe x 8	1	-	-	-
	Micro SD Card	-	-	-	1
Ethernet	Connector	2 x RJ-45	1 x RJ-45	1 x RJ-45	2 x RJ-45
Audio	Connector	2 (Line out + Mic/Line in)	1 x SPDIF/Line-out, Mic-in with jack sense support	1 x SPDIF/Line-out, Mic-in with jack sense support	-
WatchDog Timer		Yes	Yes	Yes	Yes
Storage	SATA	1 x M.2 2280 M Key (PCIe)	-	-	-
	mSATA	-	-	3 (2 x via bracket, 1 x SDM connector)	16GB /64GB eMMC on board
I/O	USB 3.0	6	5 (4 x via bracket, 1 x SDM connector)	8	1
	USB 2.0	-	-	0	1
	COM	2 x RS-232	1 x RS-232 via SDM connector (Tx/ Rx only)	1 x RS-232 via SDM connector (Tx/Rx only)	1 x RS-232
Power	Power Supply	DC 12V input	DC 12V input (via SDM Connection)	DC 12V input (via SDM Connection)	DC 12V input (via OPS connector)
Environment	Operating Temperature	0-40 °C	0-55 °C	0-55 °C	0-60 °C
Physical Characteristics	Dimensions (L x W x H)	357 x 357 x 99 mm	175 x 100 x 20 mm (SDM-L compliant)	175 x 100 x 20 mm (SDM-L compliant)	200 x 119 x 30 mm (OPS compliant)
Operating System		Microsoft Windows, Linux (optional)	Microsoft Windows, Linux (optional)	Microsoft Windows, Linux (optional)	Android 7.1.2
Certifications	EMC	CE, FCC Class B,	CE, FCC Class B	CE/FCC/VCCI/UKCA	CE, FCC Class B
	Safety	CB	N/A	CB	CCC

Note: "-" means not applicable.

Security

Whitelisting and Backup Recovery

Triellx	Application Control
	<ul style="list-style-type: none"> Protect against zero-day attacks Proactive protection
	Change Control
	<ul style="list-style-type: none"> Access rights- who, when, what Prevent out-of-policy changes

Acronis	Easy Backup Solution
	<ul style="list-style-type: none"> Full image / Incremental backup Disk and partitions backup
	Powerful Recovery
	<ul style="list-style-type: none"> Disk/partition cloning Universal restore

Comprehensive Digital Signage Solutions



Digital Signage

Entry-level to multi-display,
4K/8K playback

DeviceOn

Remote Device
Operational Efficiency

SignageCMS

Content Management

Security

Whitelisting & Backup
Recovery

Regional Service and Customization Centers

China | Kunshan
86-512-5777-5666

Taiwan | Taipei
886-2-2792-7818

Netherlands | Eindhoven
31-40-267-7000

Poland | Warsaw
00800-2426-8080

USA | Milpitas, CA
1-408-519-3898

Worldwide Offices

Asia Pacific

Taiwan
Toll Free 0800-777-111
Taipei & IoT Campus 886-2-2792-7818
Taichung 886-4-2372-5058
Kaohsiung 886-7-392-3600

China
Toll Free 800-810-0345
Beijing 86-10-6298-4346
Shanghai 86-21-3632-1616
Shenzhen 86-755-8212-4222
Chengdu 86-28-8545-0198
Hong Kong 852-2720-5118

Asia Pacific

Japan
Toll Free 0800-500-1055
Tokyo 81-3-6802-1021
Osaka 81-6-6267-1887
Nagoya 81-0800-500-1055
Nogata 81-949-22-2890

Korea
Toll Free 080-363-9494/5
Seoul 82-2-3660-9255

Singapore
Singapore 65-6442-1000

Malaysia
Kuala Lumpur 60-3-7725-4188
Penang 60-4-537-9188

Thailand
Bangkok 66-02-2488306-9

Vietnam
Hanoi 84-24-3399-1155
Hochiminh 84-28-3836-5856

Indonesia
Jakarta 62-21-751-1939

Australia
Toll Free 1300-308-531
Melbourne 61-3-9797-0100

India
Bangalore 91-94-4839-7300
Pune 91-94-2260-2349

Europe

Netherlands
Eindhoven 31-40-267-7000
Breda 31-76-523-3100

Germany
Toll Free 00800-2426-8080/81
Munich 49-89-12599-0
Düsseldorf 49-2103-97-855-0

France
Paris 33-1-4119-4666

Italy
Milan 39-02-9544-961

UK
Newcastle 44-0-191-262-4844
London 44-0-870-493-1433

Spain
Madrid 34-91-668-86-76

Sweden
Stockholm 46-0-864-60-500

Poland
Warsaw 48-22-31-51-100

Russia
Moscow 8-800-555-01-50
St. Petersburg 8-812-332-57-27
8-921-575-13-59

Czech Republic
Ústí nad Orlicí 420-465-524-421

Ireland
Galway 353-91-792444

Americas

North America
Toll Free 1-888-576-9668
Cincinnati 1-513-742-8895
Milpitas 1-408-519-3898
Irvine 1-949-420-2500
Ottawa 1-815-433-5100
Chicago 1-888-576-9668

Brazil
Toll Free 0800-770-5355
São Paulo 55-11-5592-5367

Mexico
Toll Free 1-800-467-2415
Mexico City 52-55-6275-2777

Middle East and Africa

Israel 072-2410527
Turkey 90-212-222-0422
Turkey-Bursa 90-224-413-3134

ADVANTECH

Enabling an Intelligent Planet

www.advantech.com

Please verify specifications before ordering. This guide is intended for reference purposes only.

All product specifications are subject to change without notice.

No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher.

All brand and product names are trademarks or registered trademarks of their respective companies.

© Advantech Co., Ltd. 2023

860000621